
Standard Bench B120.02



DESIGN STATEMENT

Standard bench should be used where multi-directional seating is desirable. It is also appropriate for limited space such as narrow footpath in a busy pedestrian area.

APPLICABLE LOCATION

Coburg, Brunswick, Glenroy and smaller shopping strips.

COUNCIL STANDARD DRAWING

N/A

CROSS REFERENCE DOCUMENT

- Moreland Small Shopping Strip Public Domain Manual

STANDARD SPECIFICATION

Type: Promenade Bench (FFSA001012)

Finish: Hardwood Timber Slats. Cast Aluminium Construction. Promenade Seat from Furphy Foundry. Hardwood timber slats with cast aluminium frame.

Armrest & Legs: Cast aluminium - stainless steel finish arm rest is optional and should be confirmed with Council. Stainless steel legs unless colour is specified. For shopping strip use black paint from 2-pack paint protective coating such as Luxathane or similar.

Dimension: Length 1800 mm; Width: 430mm or 790mm (width specification to be confirmed with Council).

Installation: Bolt-down fixings to be used on concrete surface, sub-surface mountings to be used on asphalt. Location should be marked with chalk and confirmed with Council officers prior to permanent installation.

SUPPLIER

Furphy Foundry www.furphyfoundry.com.au or similar.

MAINTENANCE


Council Roads Unit: Hardwood located in outdoor areas should be initially re-coated after 3 months, and every 6 months thereafter. For degraded surface which appears greying and checking, a light sanding is recommended to freshen up the timber. Replace damaged slats when necessary.

Street Cleansing Unit: Remove graffiti when required with graffiti remover. Paint on metal can be recoated using similar paint after detergent degreasing and light abrasion.


GENERAL NOTES

1. Refer to manufacturer's installation manual

B120.02 Standard Bench

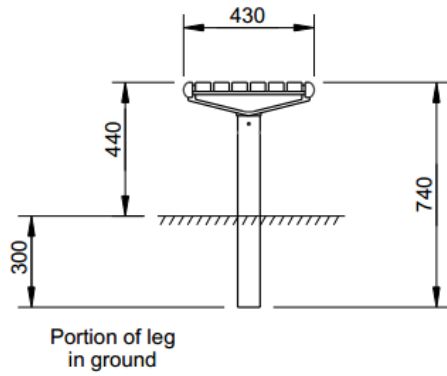

In-ground installation



Bolted-down installation

